








Edition : February 2018

Retail Prices (Ex GST)




www.orford.com.au









Orford Chill Index—Orford & Halo Refrigeration

Refrigerators—General		Page 3
	Orford FMB20	Page 5
	Orford FMB30	Page 6
	Orford EB EcoChill™ Range	Page 7
	EB EcoChill™ Energy Figures	Page 11
	Halo HR 350 Slim	Page 12
	Halo SD Refrigerators	Page 13
Refrigerators—Specialties		Page 16
	Orford Flower Fridges	Page 17
	Orford Wine Fridges	Page 20
	Orford Chocolate Fridges	Page 25
	Orford Cake Fridges	Page 28
Underbench / Underbars		Page 31
	Orford BB	
	Halo TB	Page 35
	Halo KUR Refrigerator	Page 36
	Halo KUF Freezer	Page 38
	Halo KURF Combos	Page 39
	Halo KGR	Page 40
Freezer—General		Page 41
	Orford VB36L	Page 42
	Halo Freezers	Page 43
Freezer—Specialties	Orford VB36L Ice Freezer	Page 48
Halo Food Service		Page 50
Manitowoc Ice Machines		Page 62
Orford Insert Doors		Page 74
Orford Sign Shop		Page 79
Terms & Conditions		Page 80
MEPS / Cabinet & Climate Class		Page 81
Contact Us		Page 84
Prices are excluding GST,	Freight or Insurance	

chill index

www.orford.com.au

www.halorefrigeration.com.au

1300 ORFORD

1300 673 673







General Purpose

Orford FMB

FMB20	Vertical Display Refrigerator
Capacity	557 Litres (Gross)
Dimensions	740W x 791D x 2010H
Weight	165Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	230 - 240v 50Hz. (Standard GPO)
Thermometer	Mechanical
Shelves	4 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
Door	1 x Self Closing, Double Glazed Safety Glass, Single Heat reflective Low E, Argon filled, Right Hand hinged.
Footings	Heavy Duty Castors, Lockable Front
Compressor	Danfoss
Interior Light	LED (on/off switch included)
Refrigerant	R134A
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free
Climate Class	Class 5
MEPS	Compliant (High Efficiency)
Condenser Filter	Rear mounted

	munimum Sant
	munnimini E
	oran .
>	

Orford FMB20

RRP: \$2600 + GST

Energy consumed: 5.425 kWh/24hr

Orford FMB20Sn RRP: \$2745 + GST


FMB20-Sn	rential Display Herrigorator
1101020-311	with Illuminated Advertising Sign
Construction	Powder Coated galvanized steel Int / Ext White
Capacity	557Litres (Gross)
Dimensions	740W x 791D x 2200H
Weight	165Kg
Operating Temp	0° - 5° C.
Ambient Temp	0° - 40° C.
Range	0 - 40 C.
Power Point	230 - 240v 50Hz. (Standard GPO)
Thermometer	Mechanical
Shelves	4 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
	1 x Self Closing, Double Glazed Safety Glass,
Door	Single Heat reflective Low E, Argon filled,
	Right Hand hinged.
Footings	Heavy Duty Castors, Lockable Front
Compressor	Danfoss
Interior Light	LED (on/off switch included)
Refrigerant	R134A
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free
Climate Class	Class 5
MEPS	Compliant (High Efficiency)
Condenser Filter	Rear mounted
Illuminated Advertis-	200mm High, Top Mounted.
Sign Illumination	LED

Vertical Display Refrigerator



Energy consumed: 5.589 kWh/24hr















General Purpose

Orford FMB

FMB20-Sn	Vertical Display Refrigerator
	with Illuminated Advertising Sign
Construction	Powder Coated galvanized steel Int / Ext White
Capacity	557Litres (Gross)
Dimensions	740W x 791D x 2200H
Weight	165Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	230 - 240v 50Hz. (Standard GPO)
Thermometer	Mechanical
Shelves	4 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
Door	1 x Self Closing, Double Glazed Safety Glass, Argon filled Single Heat reflective Low E, Right Hand hinged.
Footings	Heavy Duty Castors, Lockable Front
Compressor	Danfoss
Interior Light	LED (on/off switch included)
Refrigerant	R134A
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free
Climate Class	Class 5
MEPS	Compliant (High Efficiency)
Condenser Filter	Rear mounted
Illuminated Advertising	200mm High, Top Mounted.
Sign Illumination	LED

Orford	FMB20Sn—Black
RRP	: \$2745 + GST



Energy consumed: 5.425

Orford FMB30Sn-Black


RRP: \$3408 + GST



Energy consumed: 5.589 kWh/24hr

Vertical Display Refrigerator with Illumi-FMB30-Sn nated Advertising Sign Construction Powder Coated galvanized steel Int/ Ext White Capacity 889 Litres (Gross) **Dimensions** 1130W x 791D x 2200H 210Kg Weight 0° - 5° C. **Operating Temp** 0° - 40° C. **Ambient Temp Range Power Point** 230 - 240v 50Hz. (Standard GPO) Thermometer Mechanical **Shelves** 8 Height Adjustable Heavy Duty PVC Coated Shelf Adjustment 12mm Increments 1 x Self Closing, Double Glazed Safety Glass, Argon filled Door Single Heat reflective Low E, Right Hand hinged. **Footings** Heavy Duty Castors, Lockable Front Compressor **Danfoss** Interior Light LED (on/off switch included) Refrigerant R134A Insulation 50mm Polyurethane, CFC, HCFC, HFC Free Climate Class Class 5 **MEPS** Compliant (High Efficiency) Condenser Filter Rear mounted **Illuminated Advertising** 200mm High, Top Mounted. Sign Illumination















General Purpose Orford FMB

FMB30	Vertical Display Refrigerator
Construction	Powder Coated galvanized steel Interior /
Construction	Exterior White
Capacity	889 Litres (Gross)
Dimensions	1130W x 791D x 2010H
Weight	210Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	230 - 240v 50Hz. (Standard GPO)
Thermometer	Mechanical
Shelves	8 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
Door	1 x Self Closing, Double Glazed Safety Glass, Single Heat reflective Low E, Argon filled,
Footings	Heavy Duty Castors, Lockable Front
Compressor	Danfoss
Interior Light	LED (on/off switch included)
Refrigerant	R134A
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free
Climate Class	Class 5
MEPS	Compliant (High Efficiency)
Condenser Filter	Rear mounted

Orford	FMB30
RRP: \$32	265 + GST



Energy consumed: 7.59 kWh/24hr

ENABOO Co	Vertical Display Refrigerator
FMB30-Sn	with Illuminated Advertising Sign
Construction	Powder Coated galvanized steel Int/ Ext White
Capacity	889 Litres (Gross)
Dimensions	1130W x 791D x 2200H
Weight	210Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	230 - 240v 50Hz. (Standard GPO)
Thermometer	Mechanical
Shelves	8 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
	1 x Self Closing, Double Glazed Safety Glass,
Door	Single Heat reflective Low E, Argon filled,
	Right Hand hinged.
Footings	Heavy Duty Castors, Lockable Front
Compressor	Danfoss
Interior Light	LED (on/off switch included)
Refrigerant	R134A
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free
Climate Class	Class 5
MEPS	Compliant (High Efficiency)
Condenser Filter	Rear mounted
Illuminated Advertising	200mm High, Top Mounted.
Sign Illumination	LED

Orford FMB30Sn RRP: \$3408 + GST



Energy consumed: 8 kWh/24hr















PlanetSmart™ EB Ecochill ™ Range

I EB20R-Sn	Vertical Display Refrigerator
Specifications	with Illuminated Advertising Sign
Construction	Powder Coated galvanized steel Interi-
Construction	or / Exterior White
Capacity	595 Litres (Gross)
Dimensions	756W x 762D x 2220H
Weight	155Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	2.8 Amps
Thermometer	Digital
Shelves	4 Height Adjustable Heavy Duty PVC Coated
Shelves	1 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Refrigerated Shelf Area	1.42 m²
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Door	1 x Self Closing, Double Glazed Safety Glass, Double
D001	Heat reflective Low E, Warm edge, R/H
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED, Automatic and manual control
Refrigerant	R134a
Drier	Solid Core
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption	3.43 kWh/24h
Condenser Filter	Easy front access
Illuminated Advertising Sign	200mm High, Top Mounted
Sign Illumination	LED, Automatic and manual control

RRP: \$4035 + GST Orford EB20R-Sn-A






The Orford Group	Energy Consumption
EB Model	@3M1 kWh/24hr
EB20R-A	3.17
EB20R-SN-A with	3.43
illuminated sign	
	_5


















PlanetSmart Orford EB Range

E B30R-Sn	Vertical Display Refrigerator
Specifications	with Illuminated Advertising Sign
Construction	Powder Coated galvanized steel
Construction	Interior /Exterior White
Capacity	895 Litres (Gross)
Dimensions	1094W x 762D x 2220H
Weight	210Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	2.8 Amps
Thermometer	Digital
Shelves	8 Height Adjustable Heavy Duty PVC Coated
Shelves	2 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Refrigerated Shelf Area	2.17 m ²
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
D	2 x Self Closing, Double Glazed Safety Glass,
Door	Double Heat reflective Low E, Warm edge
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED, Automatic and manual control
Refrigerant	R134a
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption	4.24 kWh/24h
Condenser Filter	Easy front access
Illuminated Advertising	200mm High, Top Mounted
Sign Illumination	LED, Automatic and manual control

RRP: \$4622 + GST Orford EB30R-Sn-A



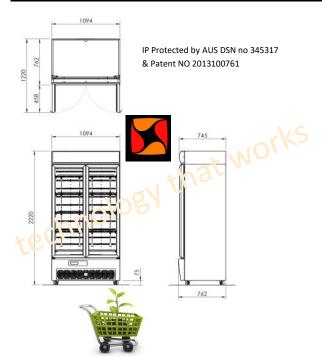

The Orford Group EB Model Energy Consumption

@3M1 kWh/24hr


EB30R-A 3.78

EB30R-SN-A with 4.24

illuminated sign

















PlanetSmart Orford EB Range

E B36R-Sn	Vertical Display Refrigerator	
Specifications	with Illuminated Advertising Sign	
Construction	Powder Coated galvanized steel Interior /Exterior White	
Capacity	1071 Litres (Gross)	
Dimensions	1286W x 762D x 2220H	
Weight	221Kg	
Operating Temp	0° - 5° C.	
Ambient Temp Range	0° - 40° C.	
Power Point	220 - 240v 50Hz. (Standard GPO)	
Input Current	2.9 Amps	
Thermometer	Digital	
Shelves	8 Height Adjustable Heavy Duty PVC Coated	
Shelves	2 Fixed Stainless Steel Base Shelves	
Shelf Adjustment	12mm Increments	
Daar	2 x Self Closing, Double Glazed Safety Glass,	
Door	Double Heat reflective Low E, Warm edge	
Footings	Heavy Duty Castors, Lockable Front	
Interior Light	LED, Automatic and manual control	
Refrigerant	R134a	
Drier	Solid Core	
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free	
Cabinet Classes	3M1, 4M1, 5M1	
MEPS	Compliant (High Efficiency)	
* Energy Consumption	4.74 kWh/24h	
Condenser Filter	Easy front access	
Illuminated Advertising	200mm High, Top Mounted	
Sign Illumination	LED, Automatic and manual control	

RRP: \$5193 + GST Orford EB36R-Sn-A





The Orford Group EB Model Energy Consumption
@3M1 kWh/24hr

EB36R-A 4.28

EB36R-SN-A with illuminated 4.74 sign





1300 ORFORD (1300 673 673)












PlanetSmart[™]

Orford EB Range

E B45R-Sn	Vertical Display Refrigerator	
Specifications	with Illuminated Advertising Sign	
Construction	Powder Coated galvanized steel	
Construction	Interior / Exterior White	
Capacity	1384 Litres (Gross)	
Dimensions	1640W x 762D x 2220H	
Weight	265 Kg	
Operating Temp	0° - 5° C.	
Ambient Temp Range	0° - 40° C.	
Power Point	220 - 240v 50Hz. (Standard GPO)	
Input Current	3.2 Amps	
Thermometer	Digital	
Shelves	12 Height Adjustable Heavy Duty PVC Coated	
Shelves	3 Fixed Stainless Steel Base Shelves	
Shelf Adjustment	12mm Increments	
Refrigerated Shelf Area	3.38 m²	
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas	
Desir	3 x Self Closing, Double Glazed Safety Glass,	
Door	Double Heat reflective Low E, Warm edge	
Footings	Heavy Duty Castors, Lockable Front	
Interior Light	LED, Automatic and manual control	
Refrigerant	R134a	
Cabinet Classes	3M1, 4M1, 5M1	
MEPS	Compliant (High Efficiency)	
* Energy Consumption	6.03 kWh/24h	
Condenser Filter	Easy front access	
Illuminated Advertising	200mm High, Top Mounted	
Sign Illumination	LED. Automatic and manual control	

RRP: \$6480 + GST Orford EB45R-Sn-A



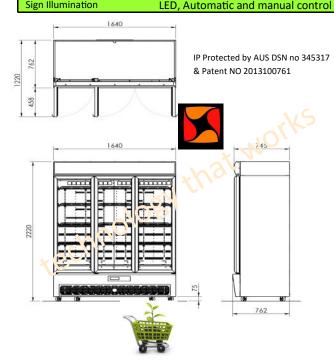

The Orford Group EB Model Energy Consumption
@3M1 kWh/24hr

EB45R-A 5.45

EB45R-SN-A with illuminated sign 6.03





1300 ORFORD (1300 673 673)












Your Carbon Footprint



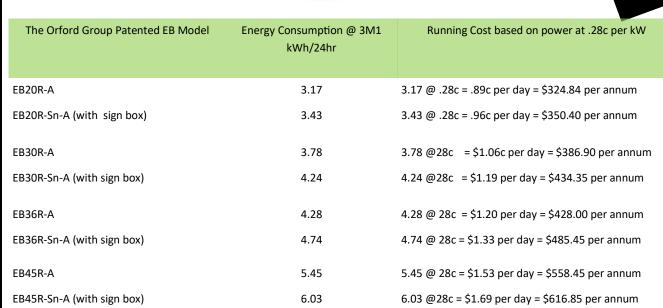









technology that works

IP Protected by AUS DSN no 345317 & Patent NO 2013100761















halo®









Halo HR350	Vertical Display Cooler with Illuminated Adver-
Specifications	tising Sign \$2850 + GST
Construction	Powder Coated galvanized steel Interior / Exterior White
Capacity	386 Litres (Gross)
Dimensions	620 W x 610 D x 1945 H
Weight	86Kg
Operating Temp	0° - 10° C.
Ambient Temperature	35° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Thermometer	Blue Line Dixell digital thermostat
Shelves	4 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Door	Self Closing, Double Glazed Safety Glass, Single Heat reflective Low E, Rt Hand hinged. With door locks
Footings	2 adjustable feet at front and 2 rollers at the back
Interior Light	LED (on/off switch included)
Refrigerant	R600a
Insulation	Polyurethane, CFC, HCFC, HFC Free
Climate Class	Class 4
MEPS	Compliant (High Efficiency)
Condenser Filter	Rear mounted
Advertising Sign	Top of the Door (illuminated)

Halo SGR 25-1G 510 Litre Fridge RRP \$4,200 + GST

Dimensions: 640 mm W x 800 mm D x 2050 h Capacity: 510 Litres

Operating Temperature: 1°C—8°C

Tested to 35°C ambient Shelves: 4

Digital Temperature Controller Weight 150 kg



Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au





halo®





Halo TGM-5SD Refrigerator RRP \$2430 + GST

167 Litre refrigerator with LED light Temp: 0— 10 degrees Levelling Feet Double Pane glass doors with Heat Reflecting film

R134a Refrigerant 2 Shelves

External: 635 W x 590 D x 775 H Weight 69kg

10 Amp plug

Halo TGM-7SD Refrigerator 215 Litres \$2505 + GST

Capacity: 215 litres

Temperature Range: 0—10 degrees Levelling Feet

LED lights

Double pane Glass doors with Heat reflecting film

Weight: 77kg

Dims: 635 w x 590 d x 970 h (mm)

Bottom Mount compressor Unit with R134a Refriger-

ant

Self-closing and stay open door features

4 shelves as standard



Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au





nalo





Halo TGM-10SD 263 Lt Refrigerator RRP \$3225+ GST

LED light Temp: 0—10 degrees

Levelling Feet R134a Refrigerant 4 shelves

Double Pane glass doors with Heat Reflecting film

External: 655 W x 590 D x 1380 H Weight 69kg

10 Amp plug

Halo TGM-15SD + GST

RRP \$ 4065 Refrigerator

450 litre refrigerator LED lights

External: 670W x 630D x 1920H

Internal: 560W x 515D x 1560H

5 shelves standard weight: 109kg 10 Amp plug

Available in black or white



Halo TGM-23 SD 597 Lt Refrigerator RRP \$4385+ **GST**

Temp: 0—10 degrees Levelling Feet LED light R134a 5 Double Pane glass doors with Heat Reflecting film shelves

External: 685 W x 770 D x 1955 H Weight 150kg

10 Amp plug

Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au





halo



Halo TGM-35SD Slimline Refrigerator RRP \$ 5375 + GST

1047 litre refrigerator LED lights

External: 1004 W x 809 D x 1956 H

Internal: 904 W x 699 D x 1535 H

10 shelves standard weight 197 kg



Cold Drinks



Halo TGM-47SD Refrigerator

1308 litre refrigerator LED lights

External: 1299 W x 809 D x 1956 H

Internal: 1199 W x 699 D x 1535 H

10 shelves standard weight: 230kg 10 Amp plug

Available in black or white

Halo TGM-72SD 2019 litre REFRIGERATOR RRP \$9085 + GST

External: 1981 W x 809 D x 1956 H

Internal: 1891 W x 709 D x 1556 H

15 shelves standard weight: 310kg

15 Amp plug

LED lights Available in black or white



Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au



specialities





Illuminated Advertising

Sign Illumination

Sign

Orford Flower Range Sell Fresh Flowers


E B36R-Sn-Flower	Vertical Flower Refrigerator	
Specifications	with Illuminated Advertising Sign	
Flower Cabinet	Designed to extend the shelf life of fresh flow-	
Tiower capinet	ers	
Capacity	1071 Litres (Gross)	
Dimensions	1286W x 762D x 2220H	
Weight	221Kg	
Florist Benefits	Temperature Management for flowers	
Colours	Ebony Black, and Snow White	
Power Point	220 - 240v 50Hz. (Standard GPO)	
Input Current	2.9 Amps	
Thermometer	Digital	
Shelves	8 Height Adjustable Heavy Duty PVC Coated	
Shelves	2 Fixed Stainless Steel Base Shelves	
Shelf Adjustment	12mm Increments	
	2 x Self Closing, Double Glazed Safety Glass,	
Door	Double Heat reflective Low E, Warm edge	
Footings	Heavy Duty Castors, Lockable Front	
Interior Light	LED, Automatic and manual control	
Refrigerant	R134a	
Cabinet Classes	3M1, 4M1, 5M1	
MEPS	Compliant (High Efficiency)	
* Energy Consumption	4.74 kWh/24h	
Condenser Filter	Easy front access	

200mm High, Top Mounted

LED, Automatic and manual control

RRP: \$5193 + GST
Orford EB36R-Sn-A-Flower





Daily running costs based on power costs of .28c per kW

- \$1.20 per day with sign box off
- \$1.33 per day with sign box on



For more information on the Orford Group flower Range including features & benefits refer to

www.flowerfridges4u.com.au

300 ORFORD (1300 673 673)



sales@orfordcom.au www.orford.com.au








Orford Flower Range Sell Fresh Flowers

■ B45R-Sn-Flower	Vertical Flower Refrigerator	
Specifications	with Illuminated Advertising Sign	
Flower Cabinet	Designed to extend the shelf life of fresh flowers	
Capacity	1384 Litres (Gross)	
Dimensions	1640W x 762D x 2220H	
Weight	265 Kg	
Florist Benefits	Temperature Management for flowers	
Colours	Ebony Black, and Snow White	
Power Point	220 - 240v 50Hz. (Standard GPO)	
Input Current	3.2 Amps	
Thermometer	Digital	
Shelves	12 Height Adjustable Heavy Duty PVC Coated	
Shelves	3 Fixed Stainless Steel Base Shelves	
Shelf Adjustment	12mm Increments	
Door	3 x Self Closing, Double Glazed Safety Glass,	
	Double Heat reflective Low E, Warm edge	
Footings	Heavy Duty Castors, Lockable Front	
Interior Light	LED, Automatic and manual control	
Refrigerant	R134a	
Cabinet Classes	3M1, 4M1, 5M1	
MEPS	Compliant (High Efficiency)	
* Energy Consumption	6.03 kWh/24h	
Condenser Filter	Easy front access	
Illuminated Advertising Sign	200mm High, Top Mounted	
Sign Illumination	LED, Automatic and manual control	

RRP: \$6480 + GST EB45R-Sn-A-Flower





745

Daily running costs based on power costs of .28c per kW

- \$1.53 per day with sign box off
- \$1.69 per day with sign box on



For more information on the Orford Group flower Range including features & benefits refer to

www.flowerfridges4u.com.au















Orford Flower Range Sell Fresh Flowers

Orford Flower Fridges 4 V Rent 2 Buy Finance

Preserve Working Capital while accessing premium equipment
Flower Fridges 4U backed by Orford Refrigeration Australia offers a
full finance package enabling quick and easy finance on your equipment purchase

Why Flower Fridges 4U Rent 2 Buy?

- \Rightarrow no upfront costs
- ⇒ Payments spread over 4 years
- \Rightarrow First 4 weeks payment free
- ⇒ At completion, the goods are yours for \$1
- ⇒ Annual repayments decrease by 5% on the anniversary date

sales@orford.com.au

1300 673 673 or 0418 700 006








www.orford.com.au www.flowerfridges4u.com.au











Economy wine Range

FMB20-Sn-Wine	Vertical Display Refrigerator with Illuminated Advertising Sign	
Construction	Powder Coated galvanized steel Int / Ext White	
Capacity	557Litres (Gross)	
Dimensions	740W x 791D x 2200H	
Weight	165Kg	
Operating Temp	0° - 5° C.	
Ambient Temp Range	0° - 40° C.	
Power Point	230 - 240v 50Hz. (Standard GPO)	
Thermometer	Mechanical	
Shelves	4 Height Adjustable Heavy Duty PVC Coated	
Shelf Adjustment	12mm Increments	
Door	Self Closing, Double Glazed Safety Glass, Argon filled Single Heat reflective Low E, Right Hand hinged.	
Footings	Heavy Duty Castors, Lockable Front	
Compressor	Danfoss	
Interior Light	LED (on/off switch included)	
Refrigerant	R134A	
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free	
Climate Class	Class 5	
MEPS	Compliant (High Efficiency)	
Condenser Filter	Rear mounted	
Illuminated Advertising Sign	200mm High, Top Mounted.	
Sign Illumination	LED	

Illuminated Advertising Sign	200mm High, Top Mounted.	
Sign Illumination	LED	
FMB30-Sn-Wine	Vertical Display Wine Refrigerator with Illuminated Advertising Sign	
Construction	Powder Coated galvanized steel Int/ Ext White	
Capacity	889 Litres (Gross)	
Dimensions	1130W x 791D x 2200H	
Weight	210Kg	
Operating Temp	0° - 5° C.	
Ambient Temp Range	0° - 40° C.	
Power Point	230 - 240v 50Hz. (Standard GPO)	
Thermometer	Mechanical	
Shelves	8 Height Adjustable Heavy Duty PVC Coated	
Shelf Adjustment	12mm Increments	
Door	Self Closing, Double Glazed Safety Glass, Argon filled Single Heat reflective Low E, Right Hand hinged.	
Footings	Heavy Duty Castors, Lockable Front	
Compressor	Danfoss	
Interior Light	LED (on/off switch included)	
Refrigerant	R134A	
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free	
Climate Class	Class 5	
MEPS	Compliant (High Efficiency)	
Condenser Filter	Rear mounted	
Illuminated Advertising Sign	200mm High, Top Mounted.	
Sign Illumination	LED	

Orford FMB20Sn-wine RRP: \$2745 + GST



Orford FMB30Sn-Wine RRP : \$3265 + GST


















PlanetSmart™ EB Wine

Range


₽ B20R-Sn-Wine	Vertical Display Wine Refrigerator	
Specifications	with Illuminated Advertising Sign	
Construction	Powder Coated galvanized steel Interior / Exterior White	
Capacity	595 Litres (Gross)	
Dimensions	756W x 762D x 2220H	
Weight	155Kg	
Operating Temp	0° - 5° C.	
Ambient Temp Range	0° - 40° C.	
Power Point	220 - 240v 50Hz. (Standard GPO)	
Input Current	2.8 Amps	
Thermometer	Digital	
Shelves	4 Height Adjustable Heavy Duty PVC Coated	
Shelves	1 Fixed Stainless Steel Base Shelves	
Shelf Adjustment	12mm Increments	
Refrigerated Shelf Area	1.42 m²	
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas	
Door	1 x Self Closing, Double Glazed Safety Glass, Double Heat reflective Low E, Warm edge, R/H	
Footings	Heavy Duty Castors, Lockable Front	
Interior Light	LED, Automatic and manual control	
Refrigerant	R134a	
Drier	Solid Core	
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free	
Cabinet Classes	3M1, 4M1, 5M1	
MEPS	Compliant (High Efficiency)	
* Energy Consumption	3.43 kWh/24h	
Condenser Filter	Easy front access	
Illuminated Advertising Sign	200mm High, Top Mounted	
Sign Illumination	LED, Automatic and manual control	

RRP: \$4035 + GST
Orford EB20R-Sn-A-Wine





IP Protected by AUS DSN no 345317 & Patent NO 2013100761







The Orford Group

Energy Consumption

EB20 Wine Cabinet

@3M1 kWh/24hr

EB20R-SN-A with sign

3.43





1300 ORFORD (1300 673 673)












PlanetSmart™ EB Wine Range

■ EB30R-Sn-wine	Vertical Wine Display Refrigerator	
Specifications	with Illuminated Advertising Sign	
Construction	Powder Coated galvanized steel	
Committee	Interior /Exterior White	
Capacity	895 Litres (Gross)	
Dimensions	1094W x 762D x 2220H	
Weight	210Kg	
Operating Temp	0° - 5° C.	
Ambient Temp Range	0° - 40° C.	
Power Point	220 - 240v 50Hz. (Standard GPO)	
Input Current	2.8 Amps	
Thermometer	Digital	
Shelves	8 Height Adjustable Heavy Duty PVC Coated	
Shelves	2 Fixed Stainless Steel Base Shelves	
Shelf Adjustment	12mm Increments	
Refrigerated Shelf Area	2.17 m²	
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas	
	2 x Self Closing, Double Glazed Safety Glass,	
Door	Double Heat reflective Low E, Warm edge	
Footings	Heavy Duty Castors, Lockable Front	
Interior Light	LED, Automatic and manual control	
Refrigerant	R134a	
Cabinet Classes	3M1, 4M1, 5M1	
MEPS	Compliant (High Efficiency)	
* Energy Consumption	4.24 kWh/24h	
Condenser Filter	Easy front access	
Illuminated Advertising	200mm High, Top Mounted	
Sign Illumination	LED, Automatic and manual control	

RRP: \$4622 + GST EB30R-Sn-A-wine






IP Protected by AUS DSN no 345317 & Patent NO 2013100761







The Orford Group EB Model

Energy Consumption @3M1 kWh/24hr

EB30R-SN-A with sign

4.24







e sales@orfordcom.au www.orford.com.au








Orford EB Wine Range

Bar Fridges 4 U


E B36R-Sn-Wine	Vertical Wine Refrigerator
Specifications	with Illuminated Advertising Sign
Wine Cabinet	
Capacity	1071 Litres (Gross)
Dimensions	1286W x 762D x 2220H
Weight	221Kg
Florist Benefits	Temperature Management for flowers
Colours	Ebony Black, and Snow White
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	2.9 Amps
Thermometer	Digital
Shelves	8 Height Adjustable Heavy Duty PVC Coated
Shelves	2 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Door	2 x Self Closing, Double Glazed Safety Glass,
	Double Heat reflective Low E, Warm edge
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED, Automatic and manual control
Refrigerant	R134a
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption	4.74 kWh/24h
Condenser Filter	Easy front access
Illuminated Advertising	200mm High, Top Mounted
Sign Illumination	LED, Automatic and manual control

RRP: \$5193 + GST EB36R-Sn-A-Wine





IP Protected by AUS DSN no 345317 & Patent NO 2013100761







www.barfridges4u.com.au

Daily running costs based on power costs of .28c per kW

- \$1.20 per day with sign box off
- \$1.33 per day with sign box on

For more information on the Orford Group Wine and Bar Range including features & benefits refer to

www.barfridges4u.com.au





1300 ORFORD (1300 673 673)



e sales@orfordcom.au www.orford.com.au







Orford EB Wine Range

Bar Fridges 4 U


■ EB45R-Sn-Wine	Vertical Wine Refrigerator	
Specifications	with Illuminated Advertising Sign	
Wine Cabinet		
Capacity	1384 Litres (Gross)	
Dimensions	1640W x 762D x 2220H	
Weight	265 Kg	
Florist Benefits	Temperature Management for flowers	
Colours	Ebony Black, and Snow White	
Power Point	220 - 240v 50Hz. (Standard GPO)	
Input Current	3.2 Amps	
Thermometer	Digital	
Shelves	12 Height Adjustable Heavy Duty PVC Coated	
Shelves	3 Fixed Stainless Steel Base Shelves	
Shelf Adjustment	12mm Increments	
Door	3 x Self Closing, Double Glazed Safety Glass,	
D001	Double Heat reflective Low E, Warm edge	
Footings	Heavy Duty Castors, Lockable Front	
Interior Light	LED, Automatic and manual control	
Refrigerant	R134a	
Cabinet Classes	3M1, 4M1, 5M1	
MEPS	Compliant (High Efficiency)	
* Energy Consumption	6.03 kWh/24h	
Condenser Filter	Easy front access	
Illuminated Advertising Sign	200mm High, Top Mounted	
Sign Illumination	LED, Automatic and manual control	

RRP: \$6480 + GST EB45R-Sn-A-Wine



Daily running costs based on power costs of .28c per kW

- \$1.53 per day with sign box off
- \$1.69 per day with sign box on



1640



www.barfridges4u.com.au

For more information on the Orford Group Bar and Wine Range including features & benefits refer to

www.BarFridges4u.com.au















"Cool-Choc"—EB30CC-Sn

Revolutionising Refrigeration Today

EB30R-CC-Sn **Vertical Display Choc Refrigerator** with Illuminated Advertising Sign **Specifications** Powder Coated galvanized steel Construction Interior /Exterior White Capacity 895 Litres (Gross) Dimensions 1094W x 762D x 2220H Weight 12° - 18° C. **Operating Temp Ambient Temp** 0° - 40° C. Range **Power Point** 220 - 240v 50Hz. (Standard GPO) 2.8 Amps **Input Current** Thermometer Digital **Shelves** 8 Height Adjustable Heavy Duty PVC Coated Shelves 2 Fixed Stainless Steel Base Shelves Shelf Adjustment 12mm Increments Refrigerated Shelf 2.17 m² Area Condensate Dispos-Automatic by energy efficient, No Cost, Hot Gas 2 x Self Closing, Double Glazed Safety Glass, Door Double Heat reflective Low E, Warm edge Footings Heavy Duty Castors, Lockable Front Interior Light LED, Automatic and manual control Refrigerant R134a **Cabinet Classes** 3M1, 4M1, 5M1 Compliant (High Efficiency) * Energy Consumption 4.24 kWh/24h Condenser Filter Easy front access Illuminated Advertis-200mm High, Top Mounted Sign Illumination LED, Automatic and manual control

RRP: \$4622 + GST EB30CC-Sn








The Orford Group EB Model	Energy Consumptio @3M1 kWh/24hr
EB30R-A	3.78
EB30R-SN-A with illuminated sign	4.24

For more information on the Orford Refrigeration Chocolate Fridge Range including features & benefits refer to

www.orford.com.au





+617 4641 7372 or 0418 700 006










"Cool-Choc"—EB36CC-Sn

Revolutionising Refrigeration Today

EB36R-CC-Sn **Vertical Display Choc Refrigerator** with Illuminated Advertising Sign **Specifications** Powder Coated galvanized steel Construction Interior /Exterior White Capacity 1071 Litres (Gross) **Dimensions** 1286W x 762D x 2220H 221Kg Weight Operating Temp 12° - 18° C. **Ambient Temp Range** 0° - 40° C. **Power Point** 220 - 240v 50Hz. (Standard GPO) **Input Current** 2.9 Amps Thermometer Digital 8 Height Adjustable Heavy Duty PVC Coated Shelves Shelves 2 Fixed Stainless Steel Base Shelves **Shelf Adjustment** 12mm Increments 2 x Self Closing, Double Glazed Safety Glass, Door Double Heat reflective Low E, Warm edge **Footings** Heavy Duty Castors, Lockable Front LED, Automatic and manual control Interior Light Refrigerant R134a Drier Solid Core 50mm Polyurethane, CFC, HCFC, HFC Free Insulation **Cabinet Classes** 3M1, 4M1, 5M1 Compliant (High Efficiency) * Energy Consumption 4.74 kWh/24h Condenser Filter Easy front access Illuminated Advertising 200mm High, Top Mounted Sign Illumination LED, Automatic and manual control

RRP: \$5193 + GST EB36CC-Sn





762

The Orford Group EB Model Energy Consumption
@3M1 kWh/24hr

EB36R-A 4.28

EB36R-SN-A with illuminated 4.74 sign

For more information on the Orford Refrigeration Chocolate Fridge Range including features & benefits refer to

www.orford.com.au



1300 ORFORD (1300 673 673)

+617 4641 7372 or 0418 700 006









"Cool-Choc"—EB45CC-Sn

Revolutionising Refrigeration Today

EB45R-Sn **Vertical Display Refrigerator** with Illuminated Advertising Sign Specifications Powder Coated galvanized steel Construction Interior / Exterior White 1384 Litres (Gross) Capacity Dimensions 1640W x 762D x 2220H Weight 265 Kg 12° - 18° C. **Operating Temp** 0° - 40° C. **Ambient Temp Range Power Point** 220 - 240v 50Hz. (Standard GPO) **Input Current** 3.2 Amps Thermometer Digital 12 Height Adjustable Heavy Duty PVC Coated Shelves Shelves 3 Fixed Stainless Steel Base Shelves **Shelf Adjustment** 12mm Increments Refrigerated Shelf Area 3.38 m² Condensate Disposal Automatic by energy efficient, No Cost, Hot Gas 3 x Self Closing, Double Glazed Safety Glass, Door Double Heat reflective Low E, Warm edge Footings Heavy Duty Castors, Lockable Front LED. Automatic and manual control Interior Light R134a Refrigerant Cabinet Classes 3M1, 4M1, 5M1 **MEPS** Compliant (High Efficiency) * Energy Consumption 6.03 kWh/24h Condenser Filter Easy front access Illuminated Advertising Sign 200mm High, Top Mounted Sign Illumination LED, Automatic and manual control

RRP: \$6480 + GST EB45CC-Sn







The Orford Group EB Model Energy Consumption
@3M1 kWh/24hr

EB45R-A 5.45

EB45R-SN-A with illuminated sign 6.03

745 For r

For more information on the Orford Refrigeration Chocolate Fridge Range including features & benefits refer to

www.orford.com.au

1300 ORFORD (1300 673 673)

+617 4641 7372 or 0418 700 006









Orford Cake & Café Range



Introducing the
ORFORD Cake and
Café Range
Available Winter
2016

Orford CDT1500

Orford CDS1500







🔷 +617 4641 7372

<u>sales@orfordcom.au</u>
www.orford.com.au









Orford Cake & Café Range

CDT1500-2	Cake Display—Tower Style					
Specifications						
Construction	Stainless Steel—internal / external					
Capacity	850 Litres (Gross)					
Dimensions	1500 W x 800 D x 1313 H (mm)					
Weight	250 Kg (net)					
Operating Temp	-2° to -8° C.					
Ambient Temp Range	0° - 32° C.					
Power Point	220 - 240v 50Hz. (Standard GPO)					
Input Current	6.3 Amps					
Thermometer	Digital					
Shelves	2 Height Adjustable Heavy Duty 2.62 m ²					
Refrigerated Shelf Area						
Rear Door	2 x Self Closing, sliding doors					
Footings	Heavy Duty Castors, Lockable Front					
Interior Light	LED					
Refrigerant	R134a					
Drier	Solid Core					
Insulation	60mm Polyurethane, CFC, HCFC, HFC Free					

Orford CDT1500 Cake Fridge RRP: \$8900 + GST







Display cakes beautifully in the Orford cake fridge

www.orford.com.au sales@orford.com.au 1300 673 673
















Orford Cake & Café Range


CDT\$1500	Cake Display				
Specifications					
Construction	Stainless Steel—internal / external				
Capacity	850 Litres (Gross)				
Dimensions	1500 W x 800 D x 1311 H (mm)				
Weight	250 Kg (net)				
Operating Temp	-2° to -8° C.				
Ambient Temp Range	0° - 32° C.				
Power Point	220 - 240v 50Hz. (Standard GPO)				
Input Current	6.3 Amps				
Thermometer	Digital				
Shelves	2 Height Adjustable Heavy Duty				
Shelf Adjustment	12mm Increments				
Refrigerated Shelf Area	2.62 m ²				
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas				
Rear Door	2 x Self Closing, sliding doors				
Footings	Heavy Duty Castors, Lockable Front				
Interior Light	LED light				
Refrigerant	R134a				
Drier	Solid Core				
Insulation	60mm Polyurethane, CFC, HCFC, HFC Free				

Orford CDS1500 Cake Fridge

RRP: \$8900 + GST








Display cakes beautifully in the Orford cake fridge

www.orford.com.au


sales@orford.com.au























PlanetSmart^{IM} **Back Bar Range**



Alfresco Dining with ORFORD

The Orford Back Bar Cooler Range

The perfect choice for your Alfresco area. The cabinets can be built fully into your cabinet or wall cavity

Energy efficient. Outdoor rated, tested to 32 degrees

The Orford Back Bar Range is part of the Orford

Planetsmart Range—saving the planet one fridge at a time



Orford BB135 Single Door Back Bar \$2010 + GST

Outdoor Glass Door Bar Fridge

Energy Efficient Stainless Steel Interior & Exterior

Dims: 600mm w x 500 d (+45mm handle) x 865 h Weight 55kg

Capacity: 135 Litres

Low E Glass Doors, LED Interior lighting, EBM fans, Carel Eco Controller, Heated Door Mullion

Orford BB210 Double Door Back Bar \$2480 + GST

Outdoor Glass Door Bar Fridge

Stainless Steel Interior & Exterior **Energy Efficient**

Dims: 900mm w x 500 d (+45mm handle) x 865 h

Capacity: 210 Litres

Low E Glass Doors, LED Interior lighting, EBM fans, Carel Eco Controller, Heated Door Mullion
























PlanetSmart™ Back

Bar Range



Orford Back Bars

Alfresco dining just got better



Interior Finish: Polished 304 Mirror Stainless

Door Finish: 304 Stainless Door Mullion: Heated Door Hinged: Self Closing Door Opened Depth: 910mm

Decibel rating: 50

Double Glazed tempered door. Low E glass

Can operate in 40 degrees ambient

Famous parts: Carel Eco controllers, EBM fans,

Embraco compressor

Door Locks

Lockable: Yes

Lighting : LED lights Adjustable Feet : Yes (4)

Shelves : 2 x flat chromed adjustable shelves per

door

MEPS compliant CTick compliant IP34 Outdoor rated

Allow 5 - 10 mm Shadowline when building into

cabinetry

Low E Glass Doors



Orford BB325 Triple Door Back Bar \$3465 + GST

Outdoor Glass Door Bar Fridge

Energy Efficient Stainless Steel Interior & Exterior

Dims: 1350mm w x 500 d (+45mm handle) x 865 h

Capacity: 325 Litres

Low E Glass Doors, LED Interior lighting, EBM fans, Carel Eco

Controller, Heated Door Mullion







<u>sales@orford.com.au</u>
www.orford.com.au







PlanetSmart^{IM} Back

Bar Range



Orford Back Bars

Alfresco dining just got better









Model	H mm	W mm	D mm	Gross Weight KGs	Refrigerant	Shelves	Capacity litres	330ml Bottles	Power Consumption (at 25 degrees ambient)
BB135	865	600	500 +45mm handle	55	R600a	2	135	104	1.93Kwh/24hrs
BB210	865	900	500 + 45mm handle	69	R600a	4	210	169	2.68Kwh/24hrs
BB325	865	1350	500 + 45mm handle	90	R600a	6	325	260	4.22Kwh/24hrs



Door locks standard



German brand EBM fan motors for reliable service









sales@orford.com.au www.orford.com.au











HALO BACK BAR FRIDGES—800mm high and 900 mm high

Halo TB6-1G Glass Door Back Bar Fridge RRP \$3050 + GST (800 mm high) RRP \$3230 + GST (900 mm high)

1 Door Back Bar Refrigerator with LOW E glass available in 800 h or 900 h

Capacity 110 Litres Temperature range 1c to 8 c

Refrigerant : R134a

Dims : $600 \text{ w} \times 515 \text{ d} \times 800 \text{ h} / 900 \text{ h}$

Height includes 10mm stub feet levellers

Halo TB9-2G(800) Glass Door Back Bar Fridge RRP \$3850 + GST (800 mm high) RRP \$4080 + GST (900 mm high)

2 Door Back Bar Refrigerator with LOW E glass

Capacity 165 Litres (190 lt for 900 mm high)

Temperature range 1c to 8 c Refrigerant: R134a

Dims : 900 w x 515 d x 800 h $\,$ / 900 h

Height includes 10mm stub feet levellers





Halo TB13-3G Glass Door Back Bar Fridge RRP \$\$4740 + GST (800mm high) RRP \$4980 + GST (900 mm high)

3 Door Back Bar Refrigerator with LOW E glass

Capacity: 261 Litres (800 mm high) 300 Litres (900mm high)

Weight 55 kg

Temp range 1c to 8 c Refrigerant: R134 Dims: 1352 w x 515 d x 900 h Weight 60 kg

Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au









Halo KUR9-1 REFRIGERATOR RRP \$3115 + GST

Undercounter Refrigerator —198 litres

Left hand side Embraco Compressor, EBM Fan

Temperature Range: 1c to 6c degrees 1 shelf, weight 72 kg

Refrigerant 134A LED Digital Display Soft Touch Controller

Dimensions: 900 w x 700 d x 850 h (mm) On castors. 10 Amp plug

Halo KUR12-2 Undercounter Fridge RRP \$3415 + GST

Embraco compressor, EBM fan Capacity 311 Litre

Temperature Range 0c to 8c, 70mm insulation

Refrigerant Gas: R134a 2 shelves, 3 Amps, input power 314w, Weight 84kg LED Digital Display and soft touch controller

Dims: 1200 w x 700 d x 850 h (mm) On castors



All stainless steel 304



Halo KUR15-2 Undercounter Fridge RRP \$3900 + GST

Embraco compressor, EBM fan Capacity 425 Litre

Temperature Range 0c to 8c, Refrigerant Gas: R134a

2 shelves, 3 Amps, input power 314w, Weight 93kg

LED Digital Display and soft touch controller

Dims: 1500 w x 700 d x 850 h (mm) On castors

Halo KUR18-3 Undercounter Fridge RRP \$4200 + GST

Embraco compressor, EBM fan Capacity 538 Litre

Temperature Range 0c to 8c, Refrigerant Gas: R134a

3 shelves, 4.4 Amps, input power 366w, Weight 109kg

LED Digital Display and soft touch controller

Dims: 1800 w x 700 d x 850 h (mm) On castors



Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au









Halo KUR9-1 REFRIGERATOR RRP \$3115 + GST

Undercounter Refrigerator —198 litres

Left hand side Embraco Compressor, EBM Fan

Temperature Range: 1c to 6c degrees 1 shelf, weight 72 kg

Refrigerant 134A LED Digital Display Soft Touch Controller

Dimensions: 900 w x 700 d x 850 h (mm) On castors. 10 Amp plug

Halo KUR12-2 Undercounter Fridge RRP \$3415 + GST

Embraco compressor, EBM fan Capacity 311 Litre

Temperature Range 0c to 8c, 70mm insulation

Refrigerant Gas: R134a 2 shelves, 3 Amps, input power 314w, Weight 84kg LED Digital Display and soft touch controller

Dims: 1200 w x 700 d x 850 h (mm) On castors



All stainless steel 304



Halo KUR15-2 Undercounter Fridge RRP \$3900 + GST

Embraco compressor, EBM fan Capacity 425 Litre

Temperature Range 0c to 8c, Refrigerant Gas: R134a

2 shelves, 3 Amps, input power 314w, Weight 93kg

LED Digital Display and soft touch controller

Dims: 1500 w x 700 d x 850 h (mm) On castors

Halo KUR18-3 Undercounter Fridge RRP \$4200 + GST

Embraco compressor, EBM fan Capacity 538 Litre

Temperature Range 0c to 8c, Refrigerant Gas: R134a

3 shelves, 4.4 Amps, input power 366w, Weight 109kg

LED Digital Display and soft touch controller

Dims: 1800 w x 700 d x 850 h (mm) On castors



Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au









Halo KUF9-1 FREEZER RRP \$ 3375 + GST

Undercounter freezer—198 litres

All stainless steel 304

Left hand side Embraco Compressor,

EBM Fan Temp Range: -21c to -12 degrees 1 shelf, weight 72 kg Refrigerant R404a LED Digital Display and Soft Touch Controller

Dimensions: 900 w x 700 d x 850 h (mm) On castors. 10 Amp plug

Halo KUF12-2 Undercounter Freezer RRP \$3710 + GST

Embraco compressor, EBM fan Capa

Capacity 311 Litre

Temperature Range: -21c to -12 degrees, 70mm insulation

Refrigerant Gas: R404a 2 shelves, 3 Amps, input power 366w, Weight 84kg

LED Digital Display and soft touch controller

Dims: 1200 w x 700 d x 850 h (mm) On castors





Halo KUF15-2 Undercounter Freezer RRP \$4100 + GST

Embraco compressor, EBM fan Capacity 425 Litre

Temperature Range: -21c to -12 degrees, 70mm insulation

Refrigerant Gas: R404a

2 shelves, 3 Amps, input power 366w, Weight 84kg

LED Digital Display and soft touch controller

Dims: 1500 w x 700 d x 850 h (mm) On castors

Halo KUF18-3 Undercounter Freezer RRP \$4800 + GST

Embraco compressor, EBM fan (

Capacity 538 Litre

Temperature Range: -21c to -12 degrees, 70mm insulation

Refrigerant Gas: R404a

3 shelves, 4.4 Amps, input power 613w, Weight 109kg

LED Digital Display and soft touch controller Dims: 1800 w x 700 d x 850 h (mm)



Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au







Halo KURF12-2 Fridge / Freezer Combo RRP \$4500 + GST

Dual temperature 2 Door Undercounter

Freezer Capacity 134 Litre Temp Range –21c to –12c, Gas: 404a

Fridge capacity 136 Litre Temp Range 1c to 5c Gas: 134a

2 doors, 1 shelf per door, 3 Amps, input power 316 w, Weight 87kg

Dims: 1200 w x 700 d x 850 h (mm) On castors



Halo KURF15-2 Fridge / Freezer Combo RRP \$4700 + GST



Dual temperature 2 Door Undercounter

Freezer Capacity 177 Litre Temp Range –21c to –12c, Gas: 404a

Fridge capacity 189 Litre Temp Range 1c to 5c Gas: 134a

2 doors, 1 shelf per door, 3 Amps, input power 316 w, Weight 96kg

Dims: 1500 w x 700 d x 850 h (mm) On castors

Halo KURF18-3 Fridge / Freezer Combo RRP \$4900 + GST

Dual temperature 3 Door Undercounter

Freezer Capacity 151 Litre Temp Range –21c to –12c, Gas: 404a

Fridge capacity 314 Litre Temp Range 1c to 5c Gas: 134a

3 doors, 1 shelf per door, 4.4 Amps, input power 366 w, Weight 112kg

Dims: 1800 w x 700 d x 850 h (mm) On castors



Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au







Gas: 134a



Halo KGR9-1 Glass Door Refrigerator RRP \$3245 + GST

1 Door Undercounter Refrigerator Digital display and control

Capacity 137Litre Temp Range 1c to 5c

 $1\ door\ with\ LOW\ E\ glass,\ 1\ shelf,\ Weight\ 80kg$

Dims: 900 w x 700 d x 850 h (mm) On castors

Halo KGR12-2 Glass Door Refrigerator RRP \$3850 + GST

2 Door Undercounter Refrigerator

Digital display and control

Capacity 311 Litre

Temp Range 1c to 5c

Gas: 134a

2 doors with LOW E glass, 2 shelf, Weight 96kg

Dims: 1200 w x 700 d x 850 h (mm)

On castors





Halo KGR15-2 Glass Door Refrigerator RRP \$4320 + GST

2 Door Undercounter Refrigerator

Digital display and control

Capacity 425 Litre

Temp Range 1c to 5c

Gas: 134a

2 doors with LOW E glass, 2 shelf, Weight 96kg

Dims: 1500 w x 700 d x 850 h (mm)

On castors

Halo KGR18—3 Glass Door Refrigerator RRP \$4975 + GST

3 Door Undercounter Refrigerator

Digital display and control

Capacity 538 Litre

Temp Range 1c to 5c

Gas : 134a

3 doors with LOW E glass, 3 shelf, Weight 127kg

Dims: 1800 w x 700 d x 850 h (mm)


On castors



Phone: 1300 673 673

Web: www.halorefrigeration.com.au



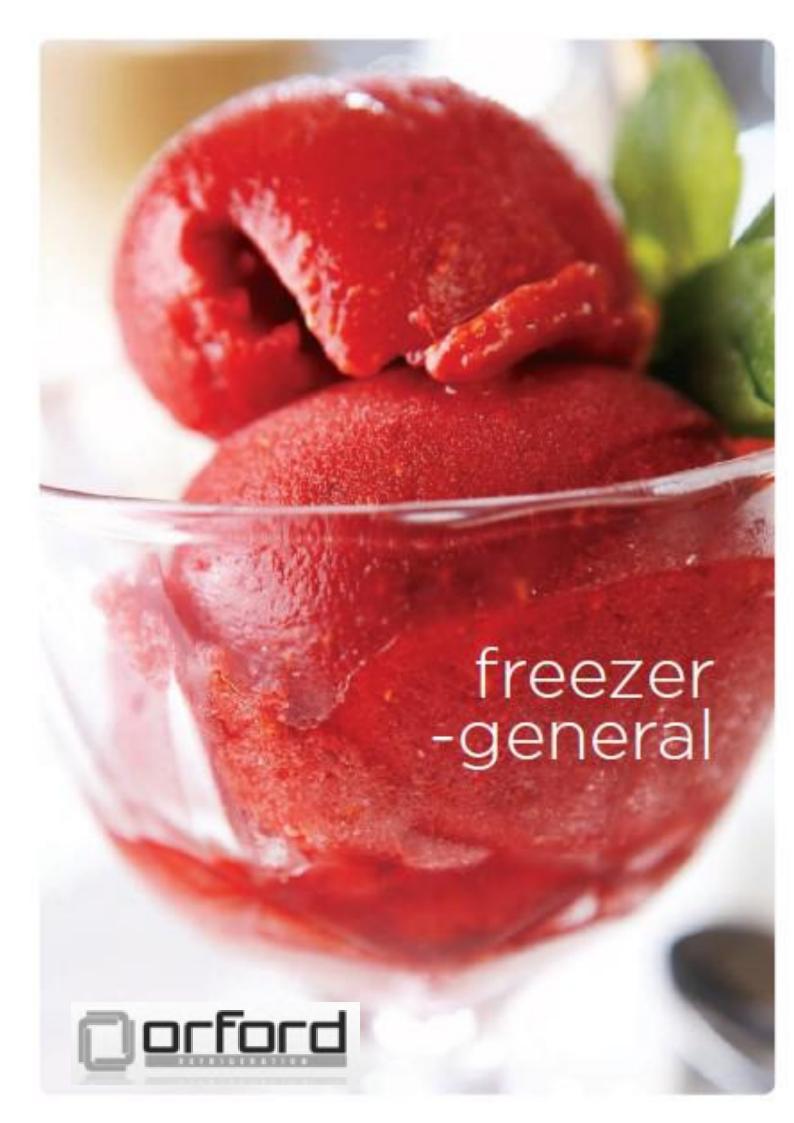






Vertical Display Freezer ₩B36L-Sn-A **Specifications** with Illuminated Advertising Sign Powder Coated galvanized steel Interior /Exterior White Construction Capacity 1071 Litres (Gross) Dimensions 1286W x 870D x 2220H (mm) Weight 250 Kg (net) -19° to -23° C. Operating Temp **Ambient Temp Range** 0° - 40° C. 220 - 240v 50Hz. (Standard GPO) **Power Point** Input Current 6.3 Amps Thermometer Digital 8 Height Adjustable Heavy Duty PVC Coated **Shelves** 2 Fixed Stainless Steel Base Shelves Shelves Shelf Adjustment 12mm Increments Refrigerated Shelf Area 2.62 m² Condensate Disposal Automatic by energy efficient, No Cost, Hot Gas 2 x Self Closing, Triple Glazed Safety Glass, Argon filled with **Full Handled Door** Double Heat reflective Low E, Warm edge with removable torsion bar, heated frame Heavy Duty Castors, Lockable Front **Footings** Interior Light LED, Automatic and manual control Refrigerant Drier Solid Core Insulation 60mm Polyurethane, CFC, HCFC, HFC Free **Cabinet Classes** 3L1, 4L2, 5L3 up to 40 degree Celsius ambient **MEPS** Compliant (High Efficiency) * Energy Consumption 20.73 kWh/24h/m2 Condenser Filter Easy front access Illuminated Advertising 205mm High, Top Mounted Sign Illumination LED, Automatic (motion sensor control) and manual control Temperature Alarms High and low temperature alarms **HACCP Function** Alarm system Defrost **Energy Efficient Hot Gas** Sign Illumination LED, Automatic and manual control

Orford VB36L-Sn-A Freezer RRP: \$7475 + GST

FREEZERS





The Orford Group

Energy Consumption

VB36L-Sn-A

19.03

Introducing the 2016 Orford Bottom Mount VB36L-Sn-A Freezer with a removable package.

Matches the Orford EB Range

100% designed by the Orford Engineering Team


Patent Protected in Australia & New Zealand


Www.orford.com.au





















Economy Freezers from Halo Refrigeration



Halo SGF 25- 1G 510 Lt Freezer RRP \$5,800 + GST

Dimensions: 640mm w x 800mm d x 2050 h Capacity: 510 Litres

Operating Temperature: -18°C—-27°C

Tested to 35°C ambient Shelves: 4

Digital Temperature Controller Weight 150 kg



Halo TOG G1F-650

Freezer

RRP \$4860 + GST

650 litre freezer with Digital Temperature Control

LED lights

-16 to -24 degrees

External: 685 W x 760D x 1984

4 shelves standard weight: 171 kg 10 Amp plug



Frozen food

Halo TOG G2F-1250 Freezer RRP \$7950 + GST

1250 litre refrigerator

LED lights

-16 to -24 degrees

External: 1382 W x 760 D x 1984 H

10 shelves standard weight: 266kg 15 Amp plug

Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au





nalo





Halo TGF-5SD

Freezer

RRP \$3185 + GST

167 litre freezer with LED lights

Triple Pane Heated Glass doors with heat reflecting film

Self closing door

R404A Refrigerant

-16 to -24 degrees

3 shelves standard

External: 635 W x 590 D x 775 H

weight: 83 kg

10 Amp plug

Halo TGF-10SD Single Door Freezer 263lt RRP \$4465 + GST

LED lights Triple Pane Heated Glass doors with heat Reflecting Film

Self closing door. Freezer has levelling feet.

R404A refrigerant

Rated Temp -16 to -24 degrees

4 shelves as standard

655W x 590 D x 1380 H

Weight 89 kg

Available in black or white

10amp Insulated Australian Plug



Halo TGF-15SD

Freezer

RRP \$5485 + GST

450 litre freezer with Digital Temperature Control

LED lights

-16 to -24 degrees

External: 670W x 630D x 1920H

Internal: 560W x 515 D x 1560H

5 shelves standard weight: 142kg 10 Amp plug

Available in Black or White

Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au









Halo SGF-25-1

Freezer

RRP \$5800 + GST

510 litre freezer with LED lights with Shadow free advertising panel

Dims: 640 w x 800 D x 2050 H (inc castors)

Door locks / Door open warning / Digital controller / Digital Temperature Display

4 adjustable shelves / dual vertical interior LED strip light

10 AMP Australian plug Shipping weight: 150 kg

Halo TGF-23SD

Freezer

RRP \$ 6345 + GST

597litre Freezer with LED lights with Shadow Free Advertising Panel


Triple Pane heated Glass doors with heat reflective film

Rated Temp : -16 to -24c

External : 685W x 770D x 1955H Internal : 585W x 655D x 1535H

5 shelves standard weight: 175kg 10 Amp plug Available in black or

white



Halo TGF-35SD

Slimline Freezer

RRP \$ 8705 + GST

1048 Lt Freezer

Digital Temperature control system

LED Lights

Temperature -16 to -24 degrees

External: 1004W x 809D x 19556H

Weight: 231kg

Available in Black or white

15 Amp Insulated Australian Plug

Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au









Halo TGF-47SD Freezer RRP \$ 9855 + GST

1308 litre freezer with Digital Temperature Control

LED lights

-16 to -24 degrees

External: 1299 W x 809D x 1956 H

Internal: 1199 W x 699 D x 1535H

10 shelves standard

weight: 265 kg 15 Amp plug

Available in Black or White

Halo TGF-72SD Freezer 2019LT FREEZER RRP \$13,815 + GST

Digital Temperature control

LED lights

16 to -24 degrees

External: 1981 W x 809D x 1956 H

15 shelves standard weight: 356 kg 15 Amp plug

Available in Black or White




Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au



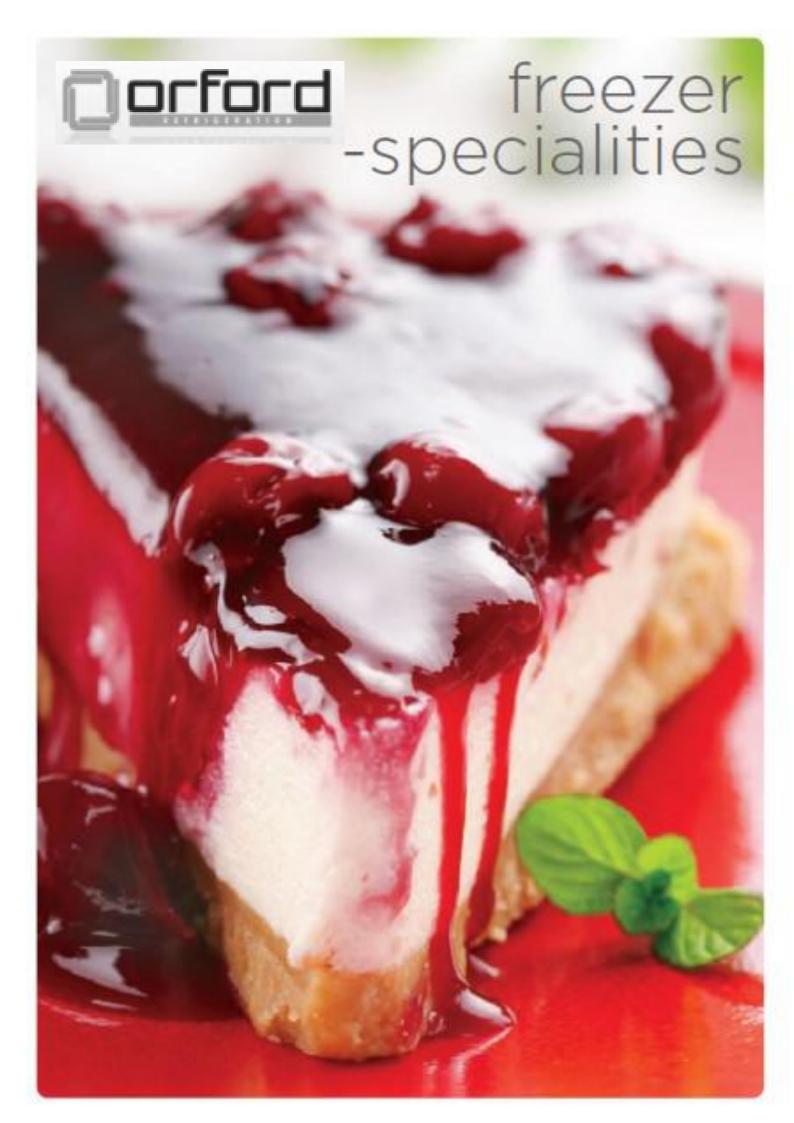






№36L-Sn-A-Ice **Vertical Display Ice Freezer Specifications** with Illuminated Advertising Sign Construction Powder Coated galvanized steel Interior /Exterior White 1071 Litres (Gross) 1286W x 870D x 2220H (mm) Dimensions Weight 250 Kg (net) Operating Temp -19° to -23° C. **Ambient Temp Range** 0° - 40° C. **Power Point** 220 - 240v 50Hz. (Standard GPO) Input Current 6.3 Amps Thermometer Digital 8 Height Adjustable Heavy Duty PVC Coated Shelves Shelves 2 Fixed Stainless Steel Base Shelves Shelf Adjustment Refrigerated Shelf Area 2.62 m² Condensate Disposal Automatic by energy efficient, No Cost, Hot Gas 2 x Self Closing, Triple Glazed Safety Glass, Argon filled with Full Handled Door Double Heat reflective Low E, Warm edge with removable torsion bar, heated frame Heavy Duty Castors, Lockable Front Interior Light LED, Automatic and manual control R404a Refrigerant Drier Solid Core Insulation 60mm Polyurethane, CFC, HCFC, HFC Free Cabinet Classes 3L1, 4L2, 5L3 up to 40 degree Celsius ambient **MEPS** Compliant (High Efficiency) * Energy Consumption 20.73 kWh/24h/m2 Condenser Filter Easy front access Illuminated Advertising 205mm High, Top Mounted Sign Illumination LED, Automatic (motion sensor control) and manual control **Temperature Alarms** High and low temperature alarms HACCP Function Alarm system Defrost **Energy Efficient Hot Gas** Sign Illumination LED, Automatic and manual control

Orford VB36L-Sn-A ICE Freezer RRP: \$7475 + GST





The Orford Group

Energy Consumption

VB Freezer Model

@3M1 kWh/24hr

VB36L-Sn-A

20.73

Maximise Ice Sales with the Orford Bottom Mount Ice Freezer with a removable package.

Matches the Orford EB Range

100% designed by the Orford Engineering Team

Patent Protected in Australia & New Zealand

Www.orford.com.au











+617 4641 7372













Halo TOG KRF 25-2 Dual Temp Fridge / Freezer RRP \$5,090 + GST

Stainless Steel top Mount Dual Temperature

Fridge with Freezer Two compressor system

Capacity in litres - Freezer 242 litres / Fridge 222 litres = 664 litres

Temperature—Fridge 1c to 8c Freezer— -21c to -12c

4 shelves (2 per door)

Fridge—R-134A 4.4amps power—w673, 15amp insulated Australian plug

Dimensions: 640 W x 850 D x 1935 H (including castors) Weight: 150kg





Halo TOG KRF 45-2 Dual Temp Fridge / Freezer RRP \$7135 + GST

Stainless Steel top Mount Dual Temperature Fridge with Freezer Two compressor system

Capacity in litres $\,$ - Freezer 464 litres $\,$ / Fridge 645 litres = 1109 litres

Blue—Freezer, Green—Fridge 6 shelves (3 per door)

 $Temperature — Fridge\ 2c\ to\ 6c \quad Freezer:\ -21c\ to\ -12c\quad 6\ shelves$

 $Fridge - R-134A\ 4.4 amps\ power - w673, 15 amp\ insulated\ Australian\ plug$

Dimensions: 1260W x 800D x 1935H (including castors) Weight: 150kg

Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au







Halo TOG KRF 45-4 Dual Temp Fridge / Freezer RRP \$7650 + GST

Stainless Steel top Mount Dual Temperature

Fridge with Freezer Two compressor system

Capacity in litres - Freezer 464 litres / Fridge 642 litres = 1106 litres

Blue—Freezer, Green—Fridge

Temperature—Fridge 2c to 6c Freezer— -21c to -12c

6 shelves (3 per door)

Fridge—R-134A 4.4amps power—w673, 15amp insulated Australian

plug Dimensions: 1260W x 800D x 1935H (including castorsWeight:

150kg





Halo TOG KDU65-3 Dual Temp Fridge / Freezer RRP \$8815 + GST

Stainless Steel top Mount Dual Temperature Two compressor system

Capacity in litres - Freezer 555 litres / Fridge 1275 litres = 1830 lts


Blue—Freezer, Green—Fridge

Temperature—Fridge 2c to 6c Freezer— -21c to -12c

9 shelves (3 per door)

Fridge—R-134A 4.4amps power—w673, 15amp insulated Australian plug

Dims: 1900W x 800D x 1935H (including castors) Wt: 175kg



Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au





halo®









Model	Temp	Doors	Net Vol- ume	Shelve s	Dimensions	Power 220v 50Hz	Shipping Weight
Halo KR25-1	Refrigerator 1~ 8 degrees	1	574	3	640w x 850d x 1926h	314w	115
Halo KF25-1	Freezer –21 ~ -12 degrees	1	574	3	640w x 850d x 1926h	496w	120
Halo KR45-2	Refrigerator 1 ~ 8 degrees	2	1215	6	1260w x 850d x 1926h	366w	190
Halo KF45-2	Freezer –21~ -12 degrees	2	1215	6	1260w x 850d x 1926h	774w	200
Halo KR65-3	Refrigerator 1—8 degrees	3	1876	9	1900w x 850d x 1926h	732w	280
Halo KF65-3	Freezer –21 ~ 12 degrees	3	1876	9	1900w x 850d x 1926h	1346w	280

Note: the depth includes 50mm for the rear condensate tray

Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au









The K Series Features

- Designed to 40 Degrees ambient operating temperature
- Requires one standard power point: 240V 50Hz
 10 amp
- Digital Temperature Display
- 3 height adjustable shelves per door. Individual shelves behind each door maximize storage configurations
- Stainless steel construction for superior corrosion resistance
- Stainless steel internal floor with coved corners allows for easy cleaning and sanitizing
- Large castors for ease of cabinet movement
- Solid lockable doors. Designed with recessed handle and self closing hinging with 90 degree dwell feature
- LED interior lighting
- One piece door gaskets, removable without tools for easy cleaning
- Automatic energy efficient hot gas condensate disposal. No drainage required
- Internal Pressure release valve

Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au









Halo KR25-1 574 litre Refrigerator RRP \$3595 + GST

Stainless Steel Top Mount Single door refrigerator, 574 litre

Ventilated Cooling Temp Range : 1c to 8c

Digital Controller and Display 3 Adjustable shelves

Refrigerant R-134a Amps 3.5 Power - W366 10 Amp

Dimensions: 640 W x 850 D x 1926 H (Including Castors) Weight—80kg



Stainless Steel Top Mount 2 door refrigerator, Volume 1215 litres

Temp Range : 1 degree to 8 degrees 3 Adjustable shelves per Door

Digital controller and Display Refrigerant R-134a

10 Amp Australian Plug



Halo KR65-3R 3 Door Refrigerator 1876 litre RRP \$7470 + GST

Volume: 1876 litres

3 Door Top Mount Refrigerator Stainless Exterior & Interior 3 Adjustable Shelves per Door

Refrigerant R-134a Fan Cooling Type

Digital Control and Display

Temp Range 1 degree to 8 degrees Weight 167KG

W 1900 x D 800 x H 1926 mm Including the castors

D830mm inc Evaporator Tray H2106 Inc castors

15 Amp Australian Plug

Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au









Halo KR25-1G Refrigerator

574 litre

RRP \$4215 + GST

Stainless Steel 1 door top mount refrigerator with lockable glass display door

Temperature range 0c—8c 6 shelves Refrigerant R-134a 3.5 Amps, Power 366w

Dimensions: 640 w x 850 d x 1926 h mm (including castors)

Lockable castors 240v / 50hz Weight: 87 kg 10 Amp Australian plug

Halo KR45 -2G Refrigerator 1215 litre RRP \$6075 + GST

Stainless Steel 2 door top mount refrigerator with 1215 litre capacity

Glass doors with key lock Soft touch controller

Door open warning Digital temperature display

Temperature range: 0 c to 8 c Refrigerant: R134a

3 shelves per door plus base

Dimensions: 1260w x 850d 1926h mm (incl castors) Weight 152kg

Energy consumption 9.65 kWh / 24 hr



Halo KR65-3G 3 Door Fridge 1876 litre RRP \$8795 + GST

Stainless steel interior and exterior

Glass doors with key lock soft touch controller

Digital temperature display, Door open warning

3 shelves per door plus base internal lighting

Temperature range: 0c to 8c

Dimensions: 1900w x 850d x 1926h (incl castors) Weight: 177kg

Energy consumption 9.65 kWh / 24 hr



Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au





halo





Halo KR25-2G 2 Half Door Fridge 572 litre RRP \$4630 + GST

Stainless steel interior & Exterior Glass doors with key lock soft touch controller

Door open warning Digital temperature display,

3 shelves per door plus base Internal lighting Temperature range: 0c to 8c

Dimensions: 640 w x 800d x 1926h (incl lockable castors)

Weight: 177g

Running Current 6 Amps, input Power 732w

Halo KR45-4G 4 Half Door Fridge 1210 litre RRP \$6655 + GST

Stainless steel interior and exterior Glass doors with key lock

Door open warning Digital temperature display,

3 shelves per door plus base Internal lighting

Temperature range: 0c to 8c

Dimensions: 1260w x 850d x 1926h (incl castors)

Weight: 152kg Energy consumption 9.65 kWh / 24 hr





Halo KR65-6G 6 Half Door Fridge 1868 litre RRP \$10200 + GST

Stainless steel interior and exterior Glass doors with key lock

soft touch controller Door open warning

Digital temperature display, 3 shelves per door plus base

Internal lighting Temperature range : 0c to 8c

Dimensions: 1900 w x 850d x 1926h (incl lockable castors)

Weight: 177g

Running Current 6 Amps, input Power 732w

Energy consumption 12.89 kWh / 24 hrs

Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au





nalo



Halo KF25-1F Freezer

574 litre

RRP \$4050 + GST

Stainless Steel Top Mount Single door freezer, **Ventilated Cooling** Temp Range −12c to −25c

Digital Controller and Display

3 Adjustable shelves Refrigerant R-404a Amps 3.5 Power - W496

10 Amp

Dimensions: 640 W x 850 D x 1926 H (Including Castors)

Weight—80kg

Energy consumed 16.45 kWh / 24 hrs

Rated at 40 degree ambient





Halo KF45 - 2F Freezer 1215 litre RRP \$6295 + GST

Stainless Steel Top Mount 2 door freezer, Temp Range –12c to –21c 3 Adjustable shelves per Door Digital controller and Display Refrigerant R-404a Amps 5.3, Power W774 10 Amp Australian Plug Dimensions W 1260 x D 850 x H 1926 mm Including castors Weight-142 kg

Halo KF65-3F 3 Door Freezer 1876 litre RRP \$9090 + GST

3 Door Top Mount Freezer

Stainless Exterior & Interior

Refrigerant R-404a

Volume: 1876 litres

3 Adjustable Shelves per Door

Fan Cooling Type

Digital Control and Display

Temp Range —12 degrees to -21c Power 1346 w Amps 8.5

Weight 167KG 10AMP plug

W 1900 x D 800 x H 1926 mm Including the castors D830mm inc Evaporator Tray H2106 Inc castors

15 Amp Australian Plug



Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au









Halo KF25-1G Freezer 574 litre RRP \$5095 + GST

Temperature range -21c to - 8c 3 shelves Refrigerant R-404a

Digital controller 4.5 Amps, Power 660w

Dimensions: 640 w x 850 d x 1926 h (including lockable castors)

Weight: 95 kg 10 Amp Australian plug Energy consumption: 16.45 kWh / 24 hrs

Halo KF25 - 2G Freezer 572 litre RRP \$5495 + GST

Stainless Steel 2 door top mount freezer with two glass half doors

Door open warning Digital temperature display

Temperature range : -21c to -12 c Refrigerant : R404a

3 adjustable shelves per door plus base Weight: 95 kg

Dims: 640 w x 850 d 1926 h mm (inc castors) Energy: 16 kWh / 24 hrs



Halo KF45 -2G Freezer 1215 litre RRP \$8665 + GST

Stainless Steel 2 door top mount freezer with glass doors

1215 litre capacity Door open warning Digital temperature display

Temp: -21c to -12 c Refrigerant: R404a 6 adjustable shelves plus base

Dimensions: 1260 w x 850 d 1926 h mm (incl castors) Weight 170 kg

Glass doors with key lock

Halo KF45-4G 4 Half Door Freezer 1210 litre RRP \$9225 + GST

Four half glass door display freezer with 1210 litre capacity

soft touch controller Door open warning

Digital temperature display, 3 shelves per door plus base 10 amp plug

internal lighting Temp range: -21c to -12c

Stainless steel interior and exterior

Dimensions: 1260 w x 850 d x 1926 h (incl castors) Weight: 170kg



Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au







Halo 20 cb —Hotel Beverage Dispenser

\$980+GST

The Halo 20 is a chilled Beverage dispenser Ideal for storing, chilling and dispensing milk and is built to withstand the demands of high traffic areas such as Hotels, Resorts, Clubs, Pubs, Cafeterias, etc.

Operates at +2 degrees to + 6 degrees at 35 degrees ambient temp and 60% humidity

Energy consumption .85 KwH/24hrs



Halo 20 Specifications	Refrigerated Milk Dispenser
Construction	White colorbond
Capacity	2 x 20 Litre Milk Bladders
Dimensions	380 W x 452 D x 810 H
Ext Dimensions	330W x 270 D x 420 H
Weight	35Kg
Operating Temp	+2° - +6° C.
Ambient Temperature	0—30° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Thermometer	Mechanical Controller
Doors	1 x Colorbond with outer illuminated LED sign box
Footing	Flat Base

Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au







HALO FOOD SERVICE SALAD AND SANDWICH TABLES



Halo TOG AMST-24 Mega Top Salad Table RRP \$4950 + GST

Mega top salad / sandwich table 24 pans

Stainless steel 863mm deep salad table

Insulated hood with 24 pans cutting board Digital temp display

temp range 1c to 5c 2 adjustable shelves

Refrigerant: R134a 4.7 Amps 366w

Dims: 1530 w x 863 d x 992 h On lockable castors 141mm high

Weight 160kg

Halo TOG AMST-30 Mega Top Salad Table

RRP \$6150 + GST

Mega top salad / sandwich table 30 pans

Stainless steel 3 door 863mm deep salad table

3 shelves, 30 pans, 2 hoods

cutting board

Capacity 640 litre

temp range 1c to 5c

3 adjustable shelves

Refrigerant: 134a 5.8 Amps Power 440w

Dims: 1846 w x 863 d x 992 h

On lockable castors 141 mm high

Weight 180kg



Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au



halo®



HALO FOOD SERVICE SALAD AND SANDWICH TABLES



Halo KHR9-1

Salad Table

RRP \$3350 + GST

Salad Side prep Table with hood

Dime : 900 w v 700 d v 978 h mm (1

Dims: 900 w x 700 d x 978 h mm (1134 inc castors) 1 door 1 shelf Refrigerant: R134a

Amps 2.5, 314 w Power Weight 75 kg

Halo KHR12-2

Salad Table

RRP \$4350 + GST

Salad Side prep Table w hood Dims: 1200 w x 700 d x 978 h mm (1134 inc castors) Capacity 309 Litres 2 door 2 shelves Refrigerant: R134a Digital control Amps 3, 314 w Power

Weight 89 kg



Capacity 213 Litres

Digital control



Halo KHR15-2

Salad Table

RRP \$4800 + GST

Salad Side prep Table with hood Dims: 1500 w x 700 d x 978 h mm (1134 inc castors) Capacity 420 Litres 2 door 2 shelves
Refrigerant: R134a Digital control Amps 3, 314 w Power

Weight 100 kg

Halo KHR18-3

Salad Table

RRP \$6200 + GST

Salad Side prep Table with hood

Dims: 1800 w x 700 d x 978 h mm (1134 inc castors)

Capacity 516 Litres 3

3 door 3 shelves

Refrigerant: R134a

Digital control

Amps 4.4, 366 w Power

Weight 120 kg




Contact Halo Refrigeration

Phone: 1300 673 673

Web: www.halorefrigeration.com.au



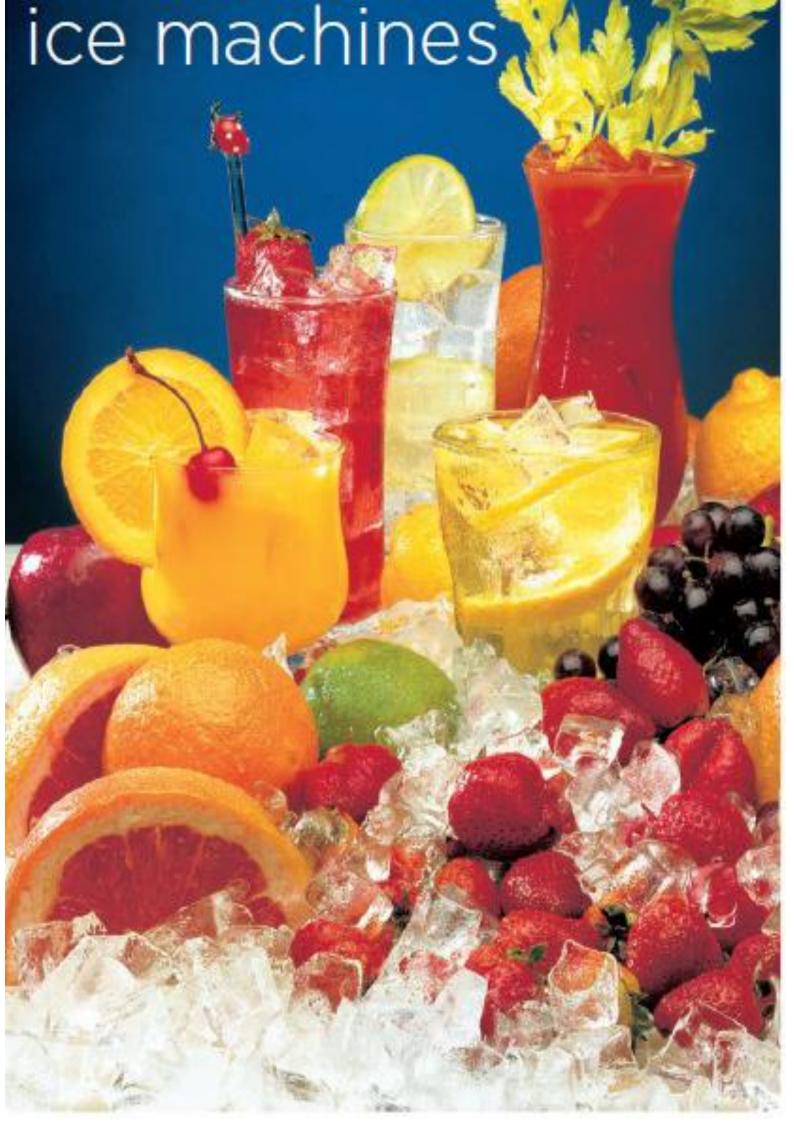



HALF DICE

DICE

REGULAR

GOURMET









Hard, clear ice cube with unique "rhomboid" shape 3/8" x 1-1/8" x 7/8" (0.95 x 2.86 x 2.22 cm) in dimension, 96 cubes per pound of ice, maximum cooling with nearly 100% ice to water ratio.


Hard, clear ice cube with unique "rhomboid" shape 7/8" x 7/8" x 7/8" (2.22 x 2.22 x 2.22 cm) in dimension, 48 cubes per pound of ice, maximum cooling with nearly 100% ice to water ratio.

Hard, clear ice cube with unique "rhomboid" shape 1–1/8" x 1–1/8" x 7/8" (2.86 x 2.86 x 2.22 cm) in dimension, 32 cubes per pound of ice, maximum cooling with nearly 100% ice to water ratio.

Hard, clear, individual ice cube with unique octagon shape 1-3/8" x 1-3/8" (3.49 x 3.49 cm) in dimension, maximum cooling with nearly 100% ice to water ratio.









NUGGET

TUBULAR NUGGET

FLAKE

CRUSHED



Easy to chew but hard enough to be dispensed without hand scooping, 3/8" (.95 cm) to 1/2" (1.27 cm) in width and



Softer texture with good cooling. Cylindrical shaped nugget with 5/8" (1.59 cm) diameter and average length of 1" (2.54 cm) with 90% ice to water ratio.



Small, soft pieces of ice with a 73% ice to water ratio. Perfect for displaying products and hand scooping into drinks.



Manitowoc dice or half dice cubes crushed into small pieces using a Manitowoc ice machine and a Servend® beverage dispenser equipped with icepic™ ice crusher.

























UG65





UG80


















Model	21 Air / 10	32 Air / 21	Storage	Dimensions	RRP ex GST
	Water	Water	Capacity	H x W x D cm	
UG30	31kg	25kg	10KG	65 X 45 X 57.5	2320
UG50	57kg	43KG	25KG	80 X 55 X 55	2920
UG65	65kg	58KG	44KG	90 X 70 X 60	3320
UG80	85kg	67KG	44KG	90 X 70 X 60	3490

Legs x 4 130

24 HOUR Production

Octagonal Cubes

All units 10amp Power





UG80









sales@orford.com.au
www.orford.com.au



















Neo U140

Neo U190

Neo U240

Neo Machines pump out the water



1300 673 673

















www.icemachines4u.com.au

Model	21 air / 10	32 air / 21	Storage	Dimensions	RRP Price Ex GST
	water	water	Capacity	H x W x D cm	
QM45	40KG	28KG	14KG	91.4 X 50 X 56.7	3430
NEO-u140	55KG	41KG	40KG	97.8 X 66 X 71.1	3950
NEO-u190	79KG	60KG	36KG	97.8 X 66 X 71.1	4140
NEO-u240	87KG	68KG	36KG	97.8 X 66 X 71.1	4620
NEO-u310	132KG	103KG	45KG	97.8 X 76.2 X 71.5	5570
LEGS X 4	30MM				85

Specs quoted are all Full dice. Half dice available. Please ask.



1300 673 673



















Machines for Tight Spaces









1300 673 673









www.orford.com.au









www.icemachines4u.com.au

24Hr production. Full and Half cubes available.

Only Full dice quoted below. Please phone or email for other models.

Model	21 Air / 10 water	32 Air / 21 water	Dimensions	RRP exc GST
Modular Width			H x W x D cm	
I-322 Full Dice	146kg	98kg	151.1 x 55.9 x 86.4	5450
I-322 Half Dice	152kg	100kg		5450
i-522 Full Dice	207kg	150kg		5710
I-522 Half Dice	211kg	162kg	181.6 x 55.9 x 86.4	5710

Bin models to suit

i-322: A320, A420 or A570 (requires adapter plate K00365 RRP \$200 + GST)

i-522: A420 or A570 (requires adapter plate K00365 RRP \$200 + GST)

Model	Storage Capacity	Dimensions	RRP exc GST
A320	95KG	96.5 X 55.9 X 86.4	1650
A420	141KG	127 X 55.9 X 86.4	1820
A570	195KG	127 X 76.2 X 86.4	2070



















I-500 head

A400 bin



i-450 head A400 bin





i-606 head A570 bin





ice machines 4 U

www.icemachines4u.com.au

i-909 head A570 bin



1300 673 673









+617 4641 7372

www.orford.com.au







24Hr production. Full and Half cubes available.

Only Full dice quoted below. Please phone or email for other models.

www.icemachines4u.com	au

Model	21 Air / 10 water	32 Air / 21 water	Dimensions	RRP exc GST
Regular Width			H x W x D cm	
i-450	183KG	139KG	151.1 X 76.2 X 86.4	5880
i-606	253kg	185kg	181.6 x 76.2 x 86.4	7140
i-906	381KG	289KG	194.3 X 76.2 X 86.4	9390
i-1106	497KG	368KG	194.3 X 76.2 X 86.4	10510

Bin models to suit

1400-1450-1500-1606: A400 OR A570 I906-i1000-i1200:


A570 or A970

Model	Storage Capacity	Dimensions	RRP exc GST
A400	132kg	96.5 x 76.2 x 86.4	1800
A570	195kg	127 x 76.2 x 86.4	2070
A970	322kg	127 x 121.9 x 86.4	2970




























S-3070C Ice Machine - 115V



CVD Condensing Unit - 208-230/60/3








www.icemachines4u.com.au

1300 673 673



















INDIGO: Intelligent thinking inside the box.

24Hr production. Full and Half cubes available.

Only Full dice quoted below. Please phone or email for other models.



Model	21 Air / 10 water	32 Air / 21 water	Dimensions	RRP exc GST
The Wide Boys			H x W x D cm	
i-1400	653kg	503kg	194.3 x 121.9 x 86.4	12550
i-1800	801kg	623kg	201.9 x 1219 x 86.4	15960
S3070	1203kg	991kg	252.7 x 121.9 x 78.7	32870

Bin models to suit

1400-1800: A970 or

F1300

S3070: F1300

Model	Storage Capacity	Dimensions	RRP exc GST
A970	322kg	127 x 121.9 x 86.4	2970
F1300	599kg	161.3 x 121.9 x 78.7	8310

Adaptor Plates


A570 bin uses K-00365 adaptor—RRP \$200 + GST

A970 bin uses K-00458 adaptor—RRP \$460 + GST

















Orford Refrigeration - Coolroom Insert Doors

Phone: 1300 ORFORD (1300 673 673)

Web: www.orford.com.au





Orford Cool Room Insert Doors

Orford Hotel Insert Doors





Replace your damaged or aging doors with Orford Cool Room Doors

- ⇒ Heavy duty torque masters with easy access to adjust and realign doors
- ⇒ Self closing Doors
- ⇒ Triple glaze panels for thermal efficiency
- ⇒ Full length handles
- ⇒ Available in clear anodised or a variety of colours with power coating

Orford Refrigeration - Coolroom Insert Doors


Phone: 1300 ORFORD (1300 673 673)

Web: www.orford.com.au







Orford Insert Cool Room Door—Standard
1596mm x 635mm




Orford Insert Cool Room Door—King 1596mm x 760mm



Orford Insert Cool Room Door—Queen 1793mm x 713mm



Orford Insert Cool Room Door—Jumbo 1857mm x 760mm



Optional Extras

- ⇒ LED lights
- ⇒ Shelves
- ⇒ Powdercoating
- ⇒ Hold Open Arms



Orford Refrigeration - Coolroom Insert Doors

Phone: 1300 ORFORD (1300 673 673)

Web: www.orford.com.au



TOFFORD REFRIGERATION BELLEVIOLE

Orford Walk In Doors

Walk in Door Features

walk in Door Features

All doors come with bumper rails to protect the door from trolley damage

Doors can be single or double action

Wiper seals fitted to reduce air loss

Single Action—Kick panel size 245mm

1 Door (2105h x 760 w)

Orford Hotel Insert Doors

Orford H1 Door Size: 658 mm x 478mm

Orford H2 Door Size: 808 mm x 478 mm

Orford H3 Door Size: 658 mm x 545 mm

Orford H4 Door Size: 808 mm x 545 mm





Orford Refrigeration - Coolroom Insert Doors

Phone: 1300 ORFORD (1300 673 673)

Web: www.orford.com.au





Equipment Finance

Preserve Working Capital with Orford Finance—Phone 1300 673 673






























Orford Sign Shop

Promote your Brand —Phone 1300 673 673







Decal Sets RRP - \$240 + GST

Orford can arrange for your artwork to be printed 2 long decals (side) + 2 short (front) decals





Gravity Feed Systems RRP - \$250 + GST per door

Sold as a Per Door kit

Slip mat + 90mm shelf front + fast fit dividers

4 shelf / 35 dividers (enough for 1 door)

- Easy to adjust as planograms change
- Increase the product visibility
- Ticket stripping included















www.orford.com.au









Terms & Conditions of Sale

Roderick Abif 1 Pty Ltd (ABN 72 150 865 008) Trading as Orford Food Services

1. TITLE

Risk in any goods supplied by the seller to the buyer shall pass when such goods are delivered to the buyer or into custody on the buyers behalf but the ownership of any goods supplied by the seller to the buyer shall remain with the seller until payment in full is made for the goods.

2. WARRANTIES AND REPRESENTATIONS

All new goods supplied are warranted to be free from defects in material and workmanship for a period of 12 months from time of invoice.

The seller is not liable for any injury, loss or damage, directly or consequential, arising out of the us of or the inability to use the goods

Before using, the buyer shall determine suitability of the goods for the buyers intended use and assume all risk and liability

3. ACCEPTANCE

An offer or quotation by the seller shall become binding upon the seller upon written or verbal acceptance of the quote or of the goods discussed verbally. Acceptance of the goods is deemed to be acceptance of these terms and conditions

REJECTION

Except for defective goods supplied by the seller, goods cannot be rejected. Goods damaged during transit on the buyers own transport are not covered by Orford Foods Services insurance.

MANUFACTURERS SPECIFICATION

Due to continuous improvement processes, product specifications may change without notice from time to time

All pricing shown in Orford catalogues are exclusive of GST, freight and insurance

Warranty

This warranty applies for calls of a breakdown service nature only, for problems of manufacturing origin. Recalls, customer related problems (power supply fluctuations, thermostat adjustments, overstocking and over loading of shelves / baskets, choked condenser etc) and any other non warranty nature calls will be charged to the service call originator at normal full rates, payable at the time of the service call.

This warranty is voided, if the equipment has not been properly maintained in accordance with the manufacturers instructions supplied with the equipment, or the equipment has been subject to power supply fulctuations, misused or transported in a manner which could prejudice the correct operation of the appliance.

Orford does not reimburse or pay for costs relating to travel time, callout or attendance fees, overtime / penalty or premium labour rates or any other costs incurred or charged.

Excluded from Orford warranty are all consumable items such as glass, gaskets, lights, elements, locks, keys, accessories, decals

All warranty work must be authorised in advance by contacting the Customer Service Department on

- ⇒ Phone 1300 673 673
- ⇒ Email : mail@orford.com.au



















CABINET CLASS is a combination of Climate Class and Temperature Class as per the requirements of Australian Standard AS1731

e.g.:- 3L1, 4L2, 5L3 etc.

CLIMATE CLASS defines the climatic ambient conditions for which the cabinet is suited.

Refer table below.

Climate Class	Ambient Temperature	Ambient Humidity
	ōС	% RH.
3	25	60
4	30	55
5	40	40
6	27	70
7	35	75

TEMPERATURE CLASS defines the temperature at which the appliance is capable of maintaining product, at a particular Climate Class as per the requirements of Australian Standard AS1731.

Refer examples below:

L1

At the above climate class product temperatures can be maintained between -15°C and -18°C.

As per Australian Standard AS1731.5: 2003 and AS1731.6: 2003. 5 Table 1.

L2

At the above climate class product temperatures can be maintained between -12°C and -18°C.

As per Australian Standard AS1731.5: 2003 and AS1731.6: 2003. 5 Table 1.

L3

At the above climate class product temperatures can be maintained between -12°C and -15°C.

As per Australian Standard AS1731.5: 2003 and AS1731.6: 2003. 5 Table 1.









www.orford.com.au






Minimum Energy Performance Standard (MEPS) Why it matters

What are the Consequences if products do NOT comply

The regulator can

- ⇒ suspend a model's registration
- ⇒ Cancel a models registration
- ⇒ Enforceable undertakings
- ⇒ Infringement notices
- ⇒ Civil penalty orders
- ⇒ Injunctions

The regulator can publicise details relating to enforcement responses including the names of registrants and the model numbers of the products



Protect Yourself

Check that the cabinet is registered for MEPS / GEMS

- ⇒ refer to the MEPS website <u>reg.energyrating.gov.au/comparator/product_types</u>
- ⇒ Research the cabinets MEPS figures on the MEPS website. If for example the MEPS figure is 5.8 (kWh/24hr/m2), this means the amount of total energy consumption over a 24 hour period per square metre of display area
- ⇒ If you cant find the cabinet on the MEPS site, assume it is NOT registered and therefore not legally able to be sold or used in Australia and / or New Zealand











Contact The Orford Group

Phone: 1300 ORFORD (673 673)

Web: www.orford.com.au

Sales@orford.com.au



Minimum Energy Performance Standard (MEPS) Why it matters

Which cabinets are covered by the compulsory MEPS / GEMS legislation

Open Face

Reach in cabinets

Food & Deli display cabinets

Bar Fridges

Glass door Merchandisers









What are MEPS Ratings?

Reference Http://www.orford.com.au/orford-eb-energy-figures.html

М1

At the above climate class product temperatures can be maintained between -1°C and +5°C. As per Australian Standard AS1731.5: 2003 and AS1731.6: 2003. 5



At the above climate class product temperatures can be maintained between -1°C and +7°C. As per Australian Standard AS1731.5: 2003 and AS1731.6: 2003. 5















Contact The Orford Group

Phone: 1300 ORFORD (673 673)

Web: www.orford.com.au

Sales@orford.com.au





Orford Refrigeration Australia

ABN 72 150 865 008

Head Office

Unit 5, Quantum Business Park

Postal Address

PO box 18120

Clifford Gardens Qld 4350



National sales:

1300 ORFORD (1300 673 673)

Corby Orford: 0418 700006

Phone: +61 7 46 345 278

Fax : +61 7 46 417 372

Key Websites:

Www.flowerfridges4u.com.au

Www.orfordspareparts.com.au

All images are subject to copyright and cannot be reproduced without permission

Jeff Ash: 0400 013 958

Email: jeff@orford.com.au

Email: sales@orford.com.au

www.orford.com.au

Www.facebook.com/theorfordgroup

Key Patents:

AUS DSN no 345317

Patent No 2013100761

"Orford" is protected by Trademark No

1452870

All efforts are made to ensure the accuracy of information, but from time to time errors may occur. Please check prior to placing orders. This publication serves as a guide to the Orford and partner products. Readers are encourage to contact Orford prior to making final purchasing decisions



